

SEAL KRETE

ORIGINAL

ALL-PURPOSE WATERPROOFER

PRODUCT DATA SHEET

DESCRIPTION: Penetrating clear satin waterproofer primarily for vertical surfaces; water-based acrylic, low odor and low VOC.

Typical Uses:

- ✓ Seal brick, stucco & concrete
- ✓ Rejuvenate old brick & plaster
- ✓ Brighten aluminum siding
- ✓ Prime vinyl siding
- ✓ Bind chalky surface
- ✓ Paint additive to extend life & coverage
- ✓ Buffer pH in hot cement
- ✓ Dustproofing and priming floors

Important: Read all directions thoroughly. Recommended: Wear gloves and safety glasses.

SURFACE PREP*: Surface must be clean and dry. Remove loose paint and excessive chalk. Repair cracks and surface breaks. Cover windows, doors, etc. and use caution when applying on windy days.

APPLICATION: Read "LIMITATIONS" section before use. This sealer is ready to use; do not dilute. Apply with a brush, roller or sprayer (garden or airless). Backroll spray applications to ensure penetration. Apply at least two coats, allowing two hours dry time between coats. Remove any overspray immediately with water. Note: Sealer goes on milky white but dries clear.

COVERAGE: 80–300 sq.ft. per gal., depending on surface porosity. Second coat application is 50% greater. Two coats are required for waterproofing bare, vertical concrete.

DRY TIME: 2–4 hours, depending on temperature and humidity.

TOPCOATING: May be topcoated with latex, oil-based or elastomeric coating when dry.

TINT LIMITS: Up to 4 oz. colorant per gallon.

PAINT ADDITIVE: 4–8 oz. of SEAL-KRETE Original can be mixed with one gallon of latex paint to improve spread rate.

CLEAN-UP & STORAGE: Clean all tools immediately after use with soap and water. Store unused product in a dry place above 32°F (0°C). KEEP FROM FREEZING.

LIMITATIONS: Use on above grade vertical surfaces or as a primer on horizontal surfaces – not for below grade use. Do not apply if rain is expected within 12 hours or if temperatures fall below 50°F within 24 hours of application. Do not use on swimming pools, bird baths, water features, cedar, redwood or in areas where hydrostatic pressure is likely to develop. Do not use on very porous substrates like low density, decorative block (use SEAL-KRETE Heavy-Duty instead).

**Sanding or removing paint containing lead may be hazardous. For information contact the National Lead Information Center at 1-800-424-LEAD or www.epa.gov/lead.*

CAUTION: Avoid contact with eyes and prolonged contact with skin. Do not ingest. In case of eye contact, flush thoroughly with water. For skin contact, wash with soap and water. If swallowed, do not induce vomiting. Drink 1–2 glasses of water and get medical attention.

KEEP OUT OF REACH OF CHILDREN.

THE MOST VERSATILE WATERPROOFING SEALER AVAILABLE

STUCCO	BRICK
BLOCK	SIDING



Product	No.	Unit	UPC Code	Carton Bar Code	Carton Size (W x D x H)	Cube / Wt. (cubic ft / lbs)	Carton Qty	Pallet Qty
Original	100001	1 gallon	0 15944 10001 3	1 00 15944 10001 0	15 x 9.5 x 13	1.07 / 36.43	4	36 cs
Original	100005	5 gallon	0 15944 10005 1	—	—	1.30 / 44.92	1	36 ea



ORIGINAL

ALL-PURPOSE WATERPROOFER

- BEST DURABILITY
- INTERIOR/EXTERIOR USE
- FOR COATED & UNCOATED
- VERTICAL SURFACES

ASTM / FEDERAL TEST STANDARDS

SEAL-KRETE Original meets or exceeds:

- ASTM E-514-74 Water Permeance of Masonry (62 mph wind driven rain test)
- ASTM D-1653 Moisture Vapor Transmission
- ASTM D-3960 VOC Compliant (less than 50 g per liter)
- Federal Specification TT-P-0035 for Water Permeability (98 mph wind driven rain test)
- Meets USDA criteria for a structural surface coating that may come in contact with food.
- OTC-compliant

LIQUID PROPERTIES

Solids: 10%

Proprietary Acrylic Resin

Water Based

Odor: Low

Appearance: Milky White, Dries Clear

VOC < 10 g/L – EPA Method 24 – Waterproofing Sealer Category

COVERAGE GUIDELINES

Material Coverage
Approx. sq.ft./gal.

Stucco/Simulated Brick	150
Concrete Slab/Tilt-ups	175
Concrete Blocks	80
Brick	125
Wood Fencing	175
Aluminum Siding	300
Galvanized Metal	300
Adobe	100
Chalky Surfaces	300

Note: Actual coverage will vary depending on porosity of surface. Use a high-solids formula, like SEAL-KRETE Heavy Duty, for low density, decorative block (split-face/fluted block).

LIMITED 5-YEAR WARRANTY: A limited 5-year warranty is available on the quality and performance of this product on a per job basis. Contact our technical service department for details on this warranty program. Otherwise, manufacturer/seller makes no warranty of any kind except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of SEAL-KRETE product or refund of purchase price. Convenience Products will not be responsible for labor or the cost of labor for removal or application of any product.

TECHNICAL SUPPORT: For more information on surface prep or application guidelines, or to obtain a Material Safety Data Sheet, call 1-800-323-7357, M-F (8:00 am–5:00 pm EST) or visit our website at www.seal-krete.com.

PROTECTS NEW OR PAINTED MASONRY

REVITALIZES COLOR, NON-YELLOWING

RESISTS MOLD & MILDEW GROWTH

BINDS CHALKY SURFACES

REJUVENATES FADED VINYL



SEALS PAINTED METAL



SEALS STUCCO




GREAT PAINT ADDITIVE



REDUCES MOLD & MILDEW GROWTH



STRENGTHENS MORTAR JOINTS

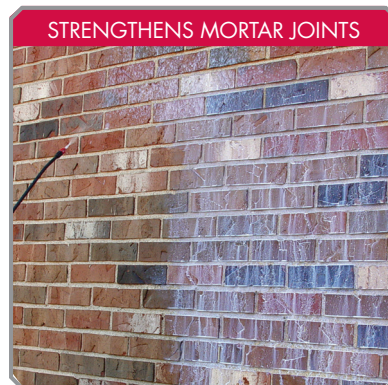

Convenience Products

306 Gandy Rd., Auburndale, FL 33823 USA

www.seal-krete.com

Questions or comments? e-mail: tech@seal-krete.com
or call 1-800-323-7357

THE MOST VERSATILE
WATERPROOFING SEALER AVAILABLE

64045-100812-SK